

## SHRINK TUNNELS VALUE SERIES

 **First in Quality. Built to Last.**



# SHRINK TUNNELS

## VALUE SERIES

### MODELS

VST1710

### BUILT RIGHT, PRICED RIGHT

Proven reliable over and over again, EASTEY Value Series Shrink Tunnels provide you with all the quality features found in much higher priced machines. They are designed and built to give you all the performance features needed for positive shrinking of polyolefin shrink films and match up perfectly with Easteey's VSA1825 Auto L-Sealer.

### RUGGED DESIGN

EASTEY Value Series Shrink Tunnels are designed to produce superior shrinking on virtually any package. Variable speed air flow, air velocity and delayed cool down are just some of the features that provide the durability you have come to rely on from EASTEY. See for yourself why EASTEY has been a leader in the shrink packaging industry for over 35 years.

## RELIABLE SHRINK PERFORMANCE




EASTEY Value Series Shrink Tunnels offer the reliability needed to provide positive shrinking of polyolefin film at a cost-effective price.

### STANDARD FEATURES

- Designed to shrink most polyolefin shrink films
- Live roller conveyor with silicone coated rollers provides a smooth finish
- 15kW heater with adjustable temperature control
- Tunnel temperature range between room temperature and 365°F (185°C)
- High velocity blower motors circulate air volume inside tunnel
- Variable air flow and air velocity for a variety of products and applications
- Tunnel window allows user to view product as it passes through tunnel and make adjustments as needed
- High quality cotton insulation keeps heat inside tunnel and minimizes energy consumption
- Delayed cool down and over temperature protection
- Conveyor speed up to 100 feet per minute
- Heavy duty casters and leveling pads for transportation within plant
- Easy to use design requires minimal training, maintenance, and trouble free operation
- CE Certification



\*VST1710 & VSA1825

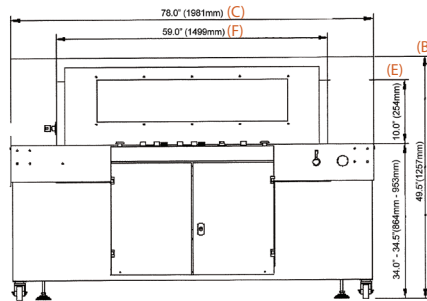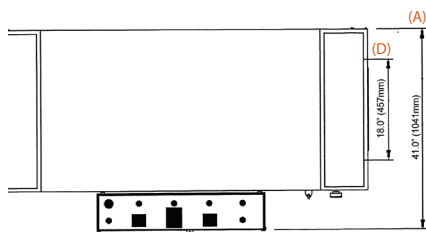

1. **Live Roller Conveyor**  
Silicone roller conveyor provides a clean, finished look for retail packaging applications
2. **Control Panel**  
Easy to use control panel allows users to adjust for their specific application
3. **Window**  
Tunnel window allows operator to view product as it passes through tunnel and make adjustments as needed
4. **Finished Product**  
Positive shrinking of polyolefin film for a retail ready package

## TECHNICAL SPECIFICATIONS

Machine Dimensions	WIDTH (A) - 41.0" (1041mm) HEIGHT (B) - 49.5" (1257mm) LENGTH (C) - 78.0" (1981mm)
Chamber Dimensions	WIDTH (D) - 18.0" (457mm) HEIGHT (E) - 10.0" (254mm) LENGTH (F) - 59.0" (1499mm)
Conveyor Speed	0-100 ft/min (0-30m/min)
Conveyor Width	18.0" (457mm)
Conveyor Length	70.0" (1780mm)
Conveyor Height	34.0 - 37.5" (864mm x 953mm)
Standard Power	Volts - 200V Amps - 30 Phase - 3
Weight	800 lbs (363kg)
Ship Weight	900 lbs (408kg)



7041 Boone Avenue North, Brooklyn Park, MN 55428  
(763) 428-4846 1 (800) 835-9344  
www.easty.com info@easty.com

