


# FUSION XL Shrink System

*For Larger Shrink Wrapping Applications*



*Vortex 72 XL and the FUSION XL*

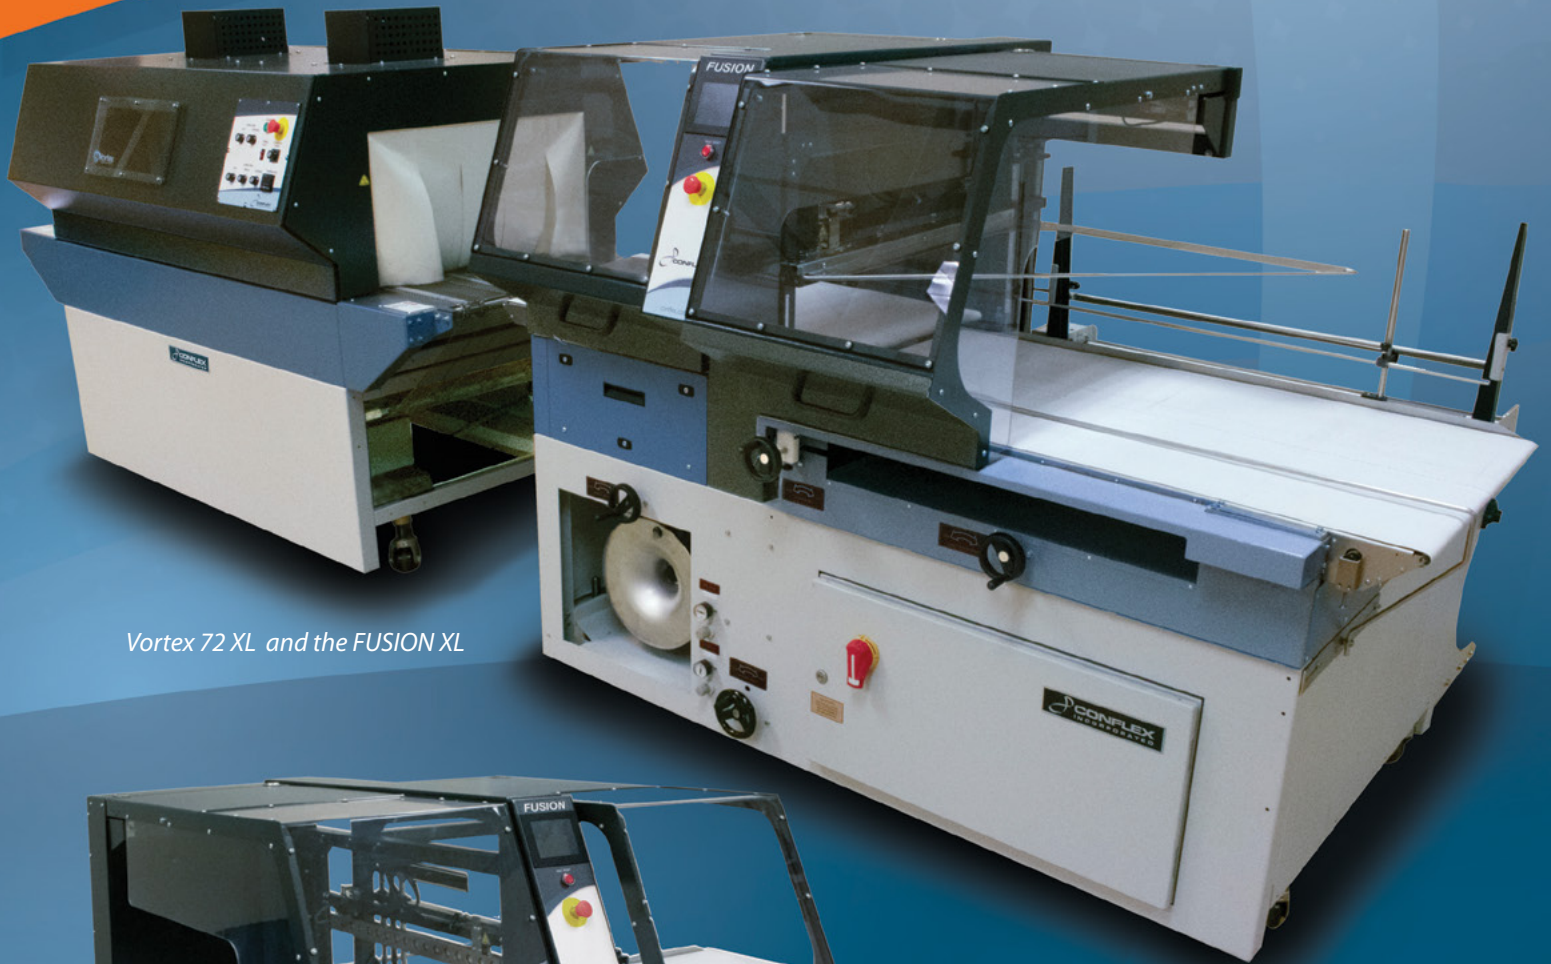

**MADE IN USA**



High Performance Automatic Shrink Packaging Systems

# FUSION XL Shrink System

## Conflex® ... Flexible People make Flexible Systems

Engineered for maximum flexibility, reliability and performance. Conflex® shrink packaging equipment incorporates leading-edge technology to take on the toughest shrink packaging challenges.

### Value Priced – Versatile and Flexible

The Conflex® FUSION XL sets the new industry standard for large format shrink wrappers. No longer do you need to take up a large portion of your factory floor for a large format shrink wrapper. The large package capabilities and flexibility of options make it the perfect choice for automatic shrink wrapping applications.

### Conflex® FUSION Features and Benefits

- **Color HMI Touch Screen** - Provides intuitive, operator-friendly product setups in three languages
- **Easy Load Film Cradle** - The fast threading process makes changeovers more efficient
- **Self-Tracking Belts** - Eliminates tracking issues and reduces maintenance
- **Open Access/Swing-Out Inverting Head** - Allows fast film threading
- **Large Film Salvage Cone** - Can hold two rolls of film scrap, reducing costly downtime
- **Mushroom Style Cross Seal** - Provides positive hot knife sealing on most films
- **UL Listed Electronics** - For dependable operation
- **Universal Side Sealer** - Runs a variety of films
- **Casters and Leg Levelers** - Standard equipment
- **Multiple Options Available** - Left-to-right product flow, stainless steel and other customizable options available


### Conflex® Vortex 72XL Specifications

Elec. Requirements:	480 Volts, 34 Amps, 3 phase
Air Requirements:	None
Chamber Dim.:	32"W x 72"H x 16"L
Conveyor Dim.:	32"W x 104"L
Machine Dim.:	105"L x 51"W x 67"H
Max. Op. Speeds:	150 feet per min.
Deck Ht. on Casters:	36" – 39" on casters leg levelers Included


### Conflex® FUSION XL Specifications

Elec. Requirements:	230V, 20 Amps, 1 Phase
Air Requirements:	80 psi, 5 cfm
Seal Bar W and Ht:	32" wide, 14" high
Max. Film Width:	40" CF
Max. Roll Diameter:	14"
Machine Dim.:	100" L x 71" W x 65" H
Max. Op. Speeds:	100' film per minute
Deck Ht. on Casters:	36.5"
Package Dimensions:	5" L to unlimited L 2" W to 30" W 1/8" H to 14" H

Conflex® Vortex XL Plan View

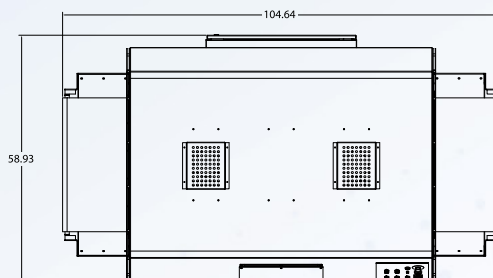

Conflex® FUSION XL Plan View

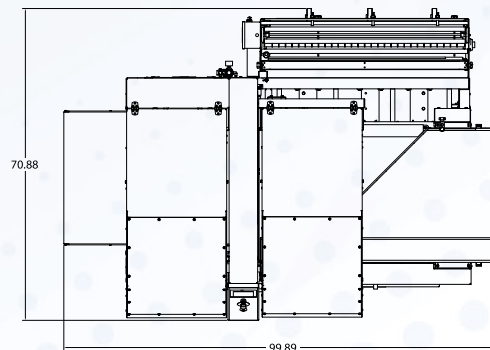

The Conflex® engineering department is available to customize machinery for special product applications.

Distributed By:



Conflex Incorporated  
Manufacturing Facility:  
W130 N 10751 Washington Drive  
Germantown, WI 53022

Toll Free: 800-225-4296  
Fax: 262-512-1665  
Email: [info@conflex.com](mailto:info@conflex.com)  
[www.conflex.com](http://www.conflex.com)

